


# **GS-60S Printer Applicator** with Leading Edge Swing Tamp

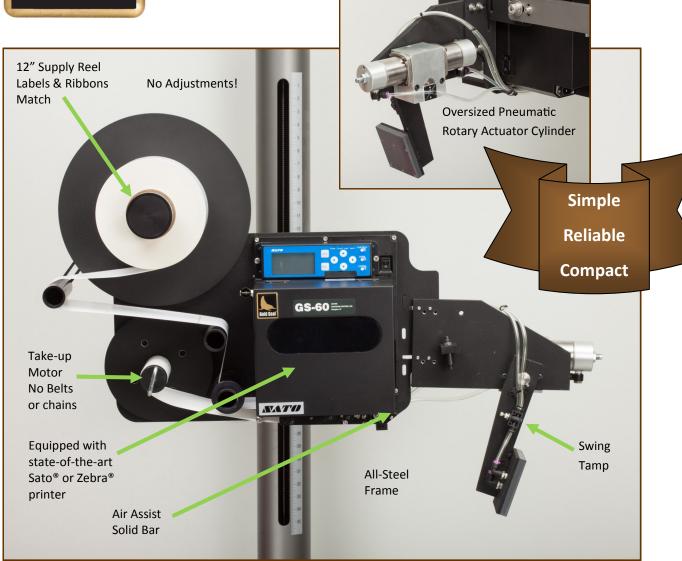

#### Please contact us today to explore the possibilities.

Headquarters: 2505 Hawkeye Court, Virginia Beach, VA 23452


Toll-free: 888-845-2235 Fax: 860-875-4293 Email: info@GoldSealApplicators.com





So easy to operate, it is "second-shift proof"



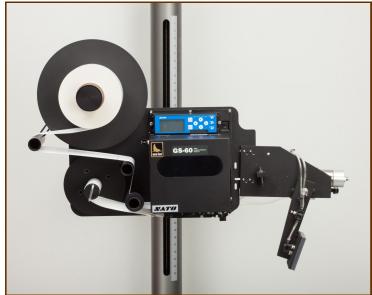

#### **General Description**

The Gold Seal® GS-60S is a state-of-the-art, value-packed thermal transfer printer applicator that's ideal for leading edge carton labeling.

#### **Key Features include:**

- No-knob, minimal operator adjustment for reliable operation
- Labels and ribbons are both the same length for maximum efficiency and minimal downtime
- Advanced, high-speed Sato® or Zebra® print engine for long, low-maintenance, reliable operating life

#### **Applicator Specifications**

Plug-in Interface Modules RS-232C serial interface (9,600 - 57,600 bps), high-speed IEEE1284(ECP) parallel interface, 10/100 Base@T Ethernet, USB, Twinax/Coax, Wireless

Label Roll Diameter: 12" O.D. Label Core Diameter: 3"

Utilities: 110-120 VAC; 60 psi dry air @ 3 cfm

Approvals: FCC Class A, UL, CSA, CE



## Please contact us today to explore the possibilities

Headquarters:

2505 Hawkeye Court, Virginia Beach, VA 23452

Toll-free: 888-845-2235 Fax: 860-875-4293

Email: info@GoldSealApplicators.com

### GoldSealApplicators.com